


**NAARVA****K25**

# A felling head for forwarders, 5-8 ton excavators and truck loader cranes

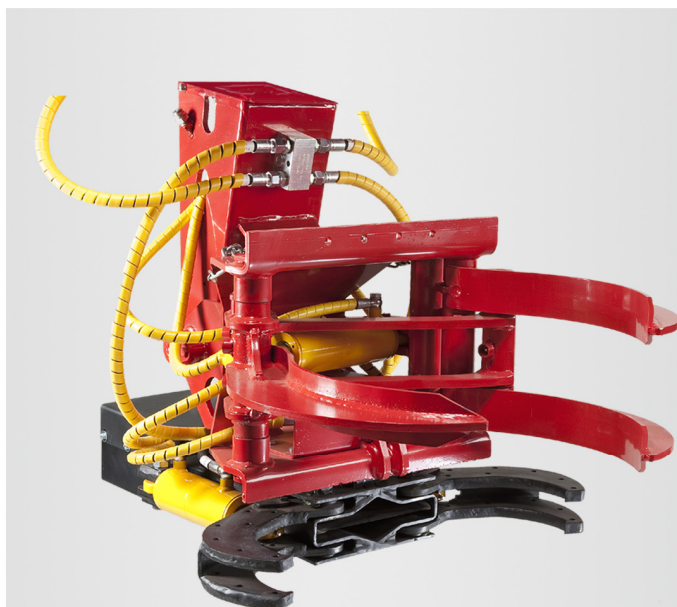

## Features

- Excellent loading properties
- Efficient guillotine cutting, 25cm
- Easy installation, no additional hydraulics or hosing
- Radio control option

## Suitable for

- Felling of single trees
- Clearing of bushes and roadsides
- Removal of problem trees
- Loading



## Effortless felling and loading


Naarva K25 is easy to install for example in the place of forwarders own loading grapple and to be used for felling, collecting, cutting and loading of trees, bushes and branches.

**A versatile auxiliary device for truck loader cranes:** Trees and bushes that have been cut down can be lifted onto the bed of a truck directly, which makes harvesting safe and efficient in areas of restricted access. Thanks to the long extension capacity of the loader crane, all trees can be cut into sections from the top down, regardless of their height.

- Removing problem trees in urban areas and residential plots
- Removing hedges, old poles, and posts
- Shortening branches
- Cutting and lifting of trees fallen on power lines, roads, and buildings

### Strong guillotine

MAXIMUM CUTTING POWER

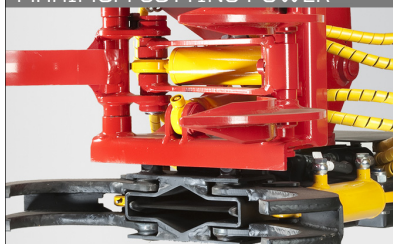

- Traditional Naarva-guillotine
- A clean and even cutting surface
- A two-phase cutting
  1. Grippers close around the tree
  2. Cutting cylinder pushes the blade through the tree
- Max. cutting Ø25 cm

### Fast guillotine

MAXIMUM CUTTING SPEED



- New innovative Naarva-guillotine
- A clean and even cutting surface
- Cuts with one stroke
  1. Grippers close around the tree and force the blade through the wood
- Max. cutting Ø28 cm

	Strong guillotine	Fast guillotine
<b>Production code</b>	<b>H25</b>	<b>HK28</b>
<b>Weight</b>	300 kg	360 kg
<b>Height in felling position</b>	70 cm	80 cm
<b>Grapple opening</b>	60 cm	60 cm
<b>Cutting diameter*, force and time**</b>	Max. cutting: Ø 25 cm Cutting force: 95 kN Cutting time: 1,8s	Max. cutting: Ø 28 cm Cutting force: 60 kN Cutting time: 1,4 s
<b>Required pressure</b>	170-200 bar	
<b>Required oil flow</b>	50-90 l/min	
<b>Warranty</b>	12 months or 1000 hours	
<b>Control system</b>	Cable control with 3 buttons	
<b>Voltage</b>	12V or 24V	

All provided values are approximations. The manufacturer reserves the right to make changes in the products. 04/2011

\* The max. cutting diameter is approx. 30% lower for hard wood (such as oak and beech). \*\* With oil flow 70 l/min.

## Accessories

- Radio control with various control options
  - Extension boom for 5-8 ton excavator, 1 m reach
  - Cejn Flat face quick couplings
  - FR10/FR15/FR12 rotator or Baltrotor GR603 DB rotator
  - Link for the rotator
  - Spare part packages
- The basic wear and tear part package includes seal kits, rubber dampers and valve connectors.  
-The wide spare part package includes the same as the basic package as well as spare parts for valves and complete hose set.

For more information: [www.naarva.fi](http://www.naarva.fi)

[www.naarva.fi](http://www.naarva.fi)

### MANUFACTURER

**PP PENTIN PAJA**

Pamilonkatu 30, 80130 Joensuu  
TEL 013 825 051, FAX 013 825 053

### SALES, SPARE PARTS AND TECHNICAL SUPPORT

Janne Häikiö ..... 040 733 0405  
Juha Korhonen ..... 050 558 2027  
E-MAIL: [info@pentinpaja.fi](mailto:info@pentinpaja.fi)

### DEALER

**afa AG für Anbaugeräte**  
Am Rotbach 10  
CH-6033 Buchrain LU  
Tel.: 041 449 55 88  
Fax: 041 449 55 89  
[mail@afa-ag.ch](mailto:mail@afa-ag.ch)  
[www.afa-ag.ch](http://www.afa-ag.ch)